


## SVP1 – Series Single Vane Pump

These pumps work as a source of hydraulic power especially for low noise operation. They combine stable performance and robust construction with range of delivery rates.



Graphic Symbol



### Specifications

Model Number	Geometric Displacement cm <sup>3</sup> /rev.	Max. Opr. Pressure Kg/cm <sup>2</sup>	Output Flow & Input Power kW	Shaft Speed Range r/min.		Mass Kg.	
				Max.	Min.	Flange Mounting	Foot Mounting
SVP1※-3	3.6	210	Refer Page 156 & 157	1800*	750	6.2	7
SVP1※-5	5.4						
SVP1※-7	7.8						
SVP1※-8	8.7						
SVP1※-10	11.6						
SVP1※-13	13.8						
SVP1※-14	14.3						
SVP1※-26	25.8						

\* For speeds above 1500 r/min., consult factory for information.

### Model Number Designation

F-	SVP1	T	-3	-L	-R	A	A	-10
Special Seals **	Series Number	Type of Connection	Nominal Delivery	Type of Mounting	Direction of Rotation	Discharge Port Position	Suction Port Position	Design Number *
					As Viewed From Shaft End			
<b>F:</b> For Phosphate Ester type Fluids. (Omit if not required)	<b>SVP1</b>	<b>T:</b> Threaded Connection	<b>3</b> <b>5</b> <b>7</b> <b>8</b> <b>10</b> <b>13</b> <b>14</b> <b>26</b>	<b>L:</b> Foot Type  <b>F:</b> Flange Type	<b>R:</b> Clockwise (Normal)  <b>L:</b> Counter-clockwise			<b>10</b>

\* Design numbers subject to change from 10 to 19, but installation dimensions remain as shown.

\* For instructions regarding changing the port positions, consult CNIP INDIA LTD.

\*\* Before ordering the Special Seals, consult CNIP INDIA LTD.

### SVP Series Single Vane Pump

## Cartridge Kit Model Number

CSVP1T	-3	-R	-10
Model Number	Nominal Delivery	Shaft Rotation	Design No.
CSVP1T	3	R: Clockwise (Normal)	10
	5		
	7		
	8		
	10	L: Counter- Clockwise	
	13		
	14		
	26		

\* For instructions regarding replacing cartridge kit, consult CNIP INDIA LTD.

## Spare Parts List

### List of Seals


Sl. No.	Name of Part	Part Number	Qty.
1.	O-Ring	SO-NB-G80	1
2.	O-Ring	SO-NB-G60	1
3.	O-Ring	SO-NB-G35	1
4.	Oil Seal	ISD 20307	1

Note: When ordering the seals, please specify the seal kit number KS-SVP1-10.

## SVP1T-※-F-※※-10


DIMENSIONS IN MILLIMETRES

### Flange Mounting

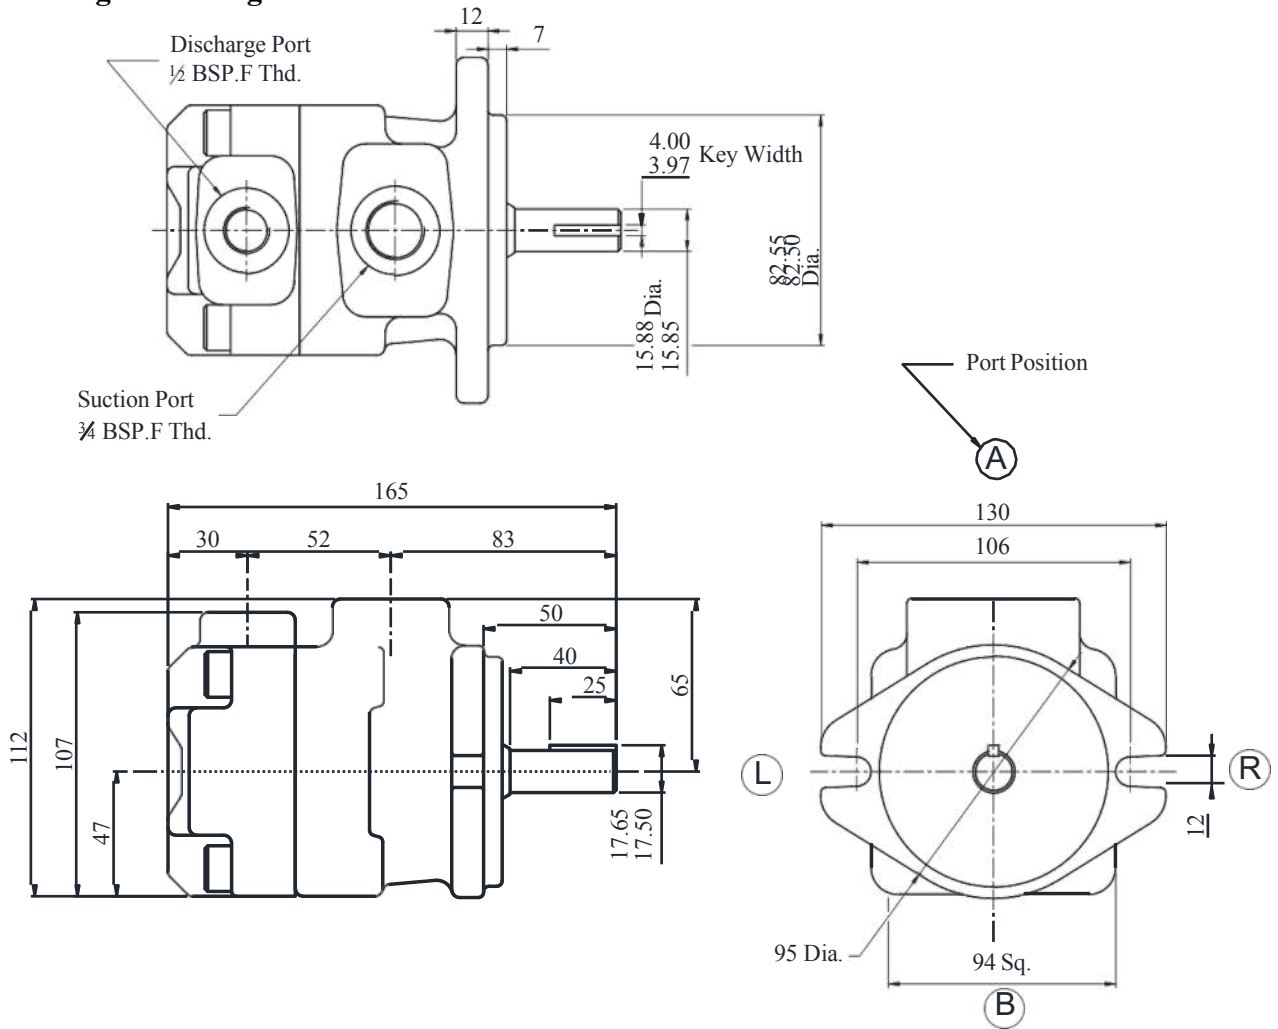

## SVP1T-※-L-※※-10

### Foot Mounting

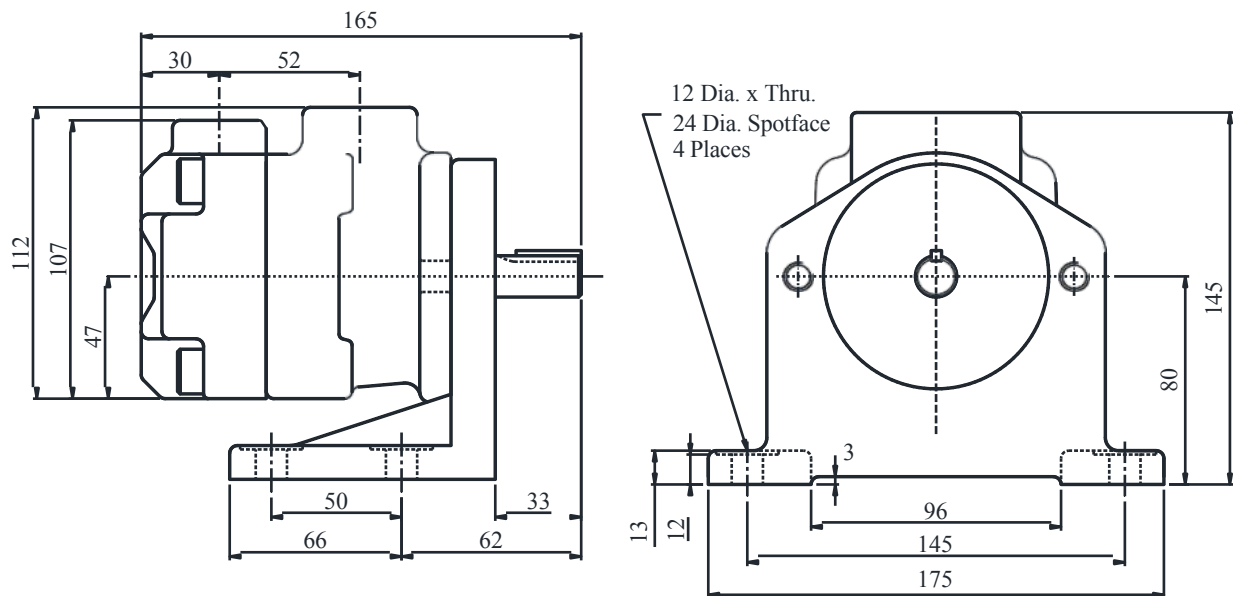


For further dimensions refer Flange Mounting.

## SVP1T-26-※-F-※※-10


### Flange Mounting

DIMENSIONS IN MILLIMETRES

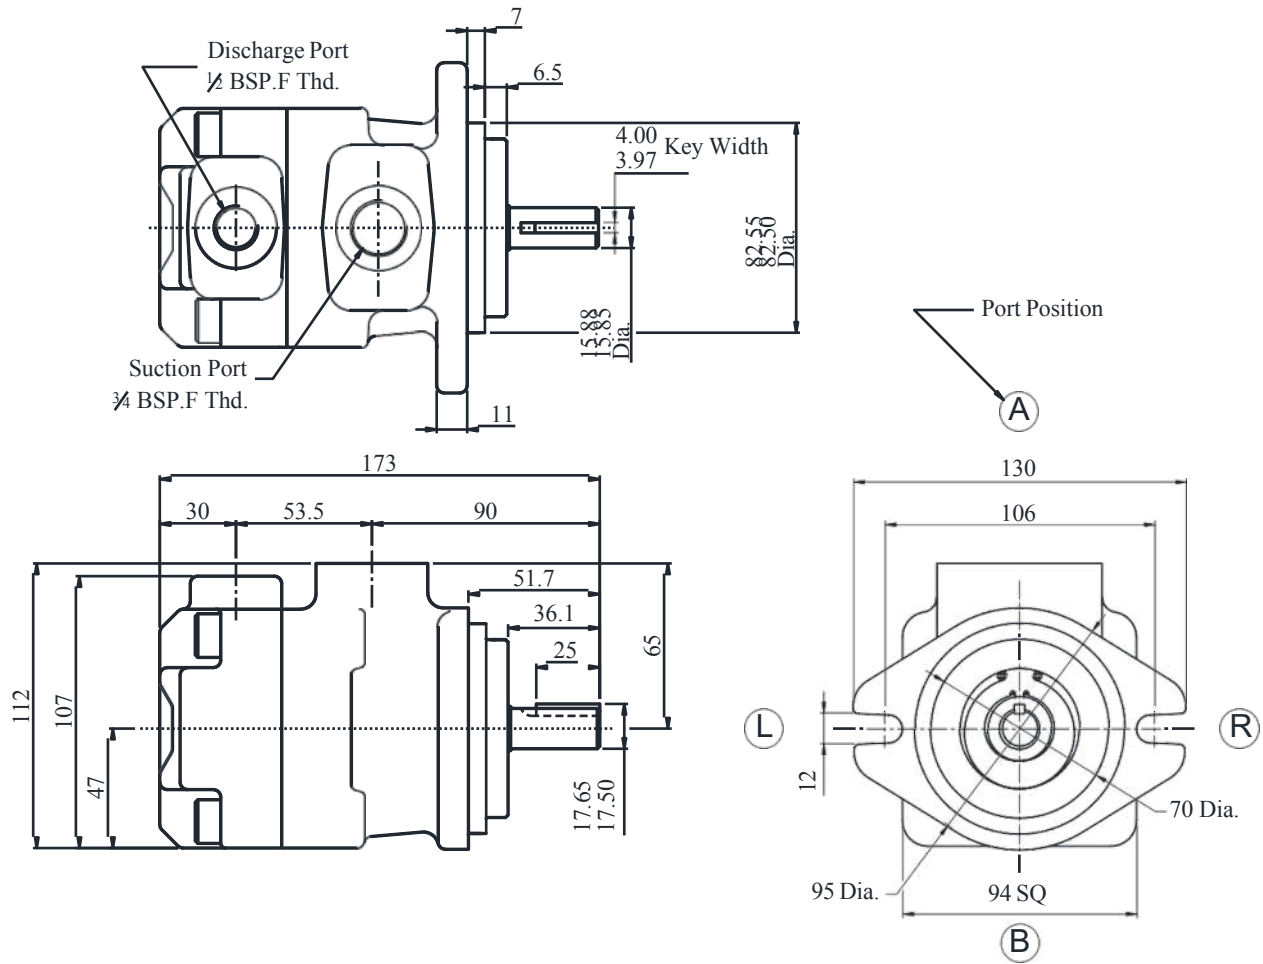

## SVP1T-26-※-L-※※-10


### Foot Mounting

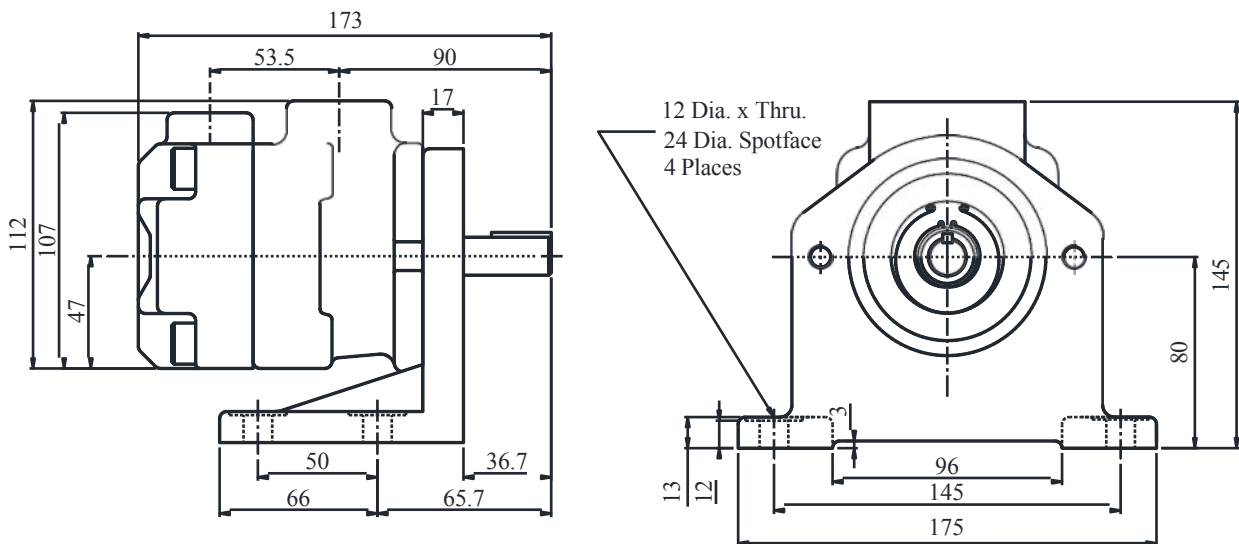


For further dimensions refer Flange Mounting.

## Typical Pump Characteristics Oil Viscosity 20 cSt [VG 32, Temp 50°C]


### • SVP1 – 3

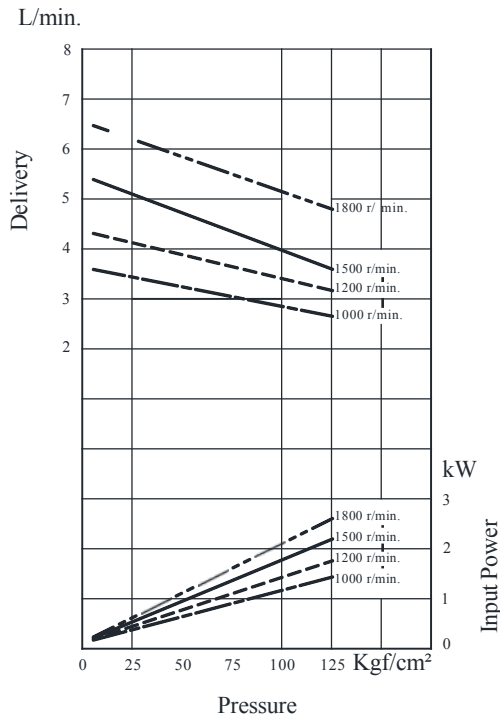


### • SVP1 – 5

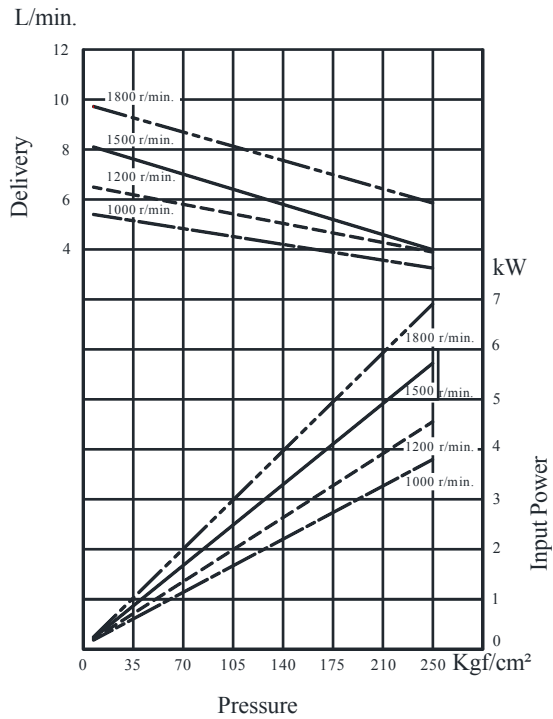

### • SVP1 – 7

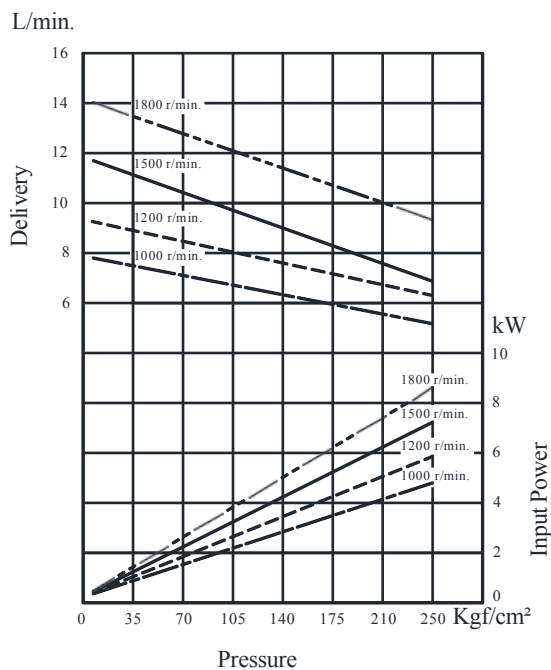


### • SVP1 – 8

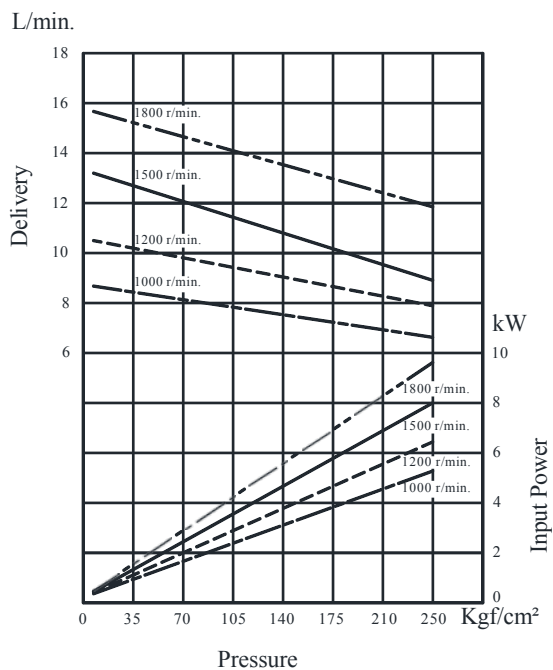


## Typical Pump Characteristics Oil Viscosity 20 cSt [VG 32, Temp 50°C]


• SVP1 – 10

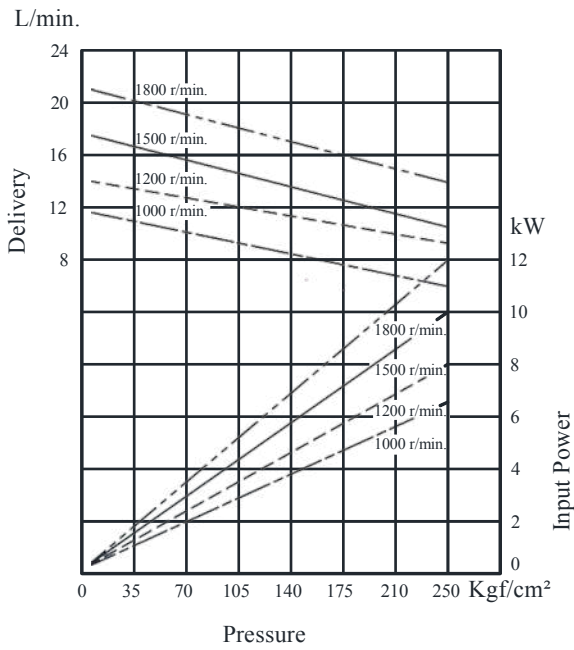


? SVP1 – B

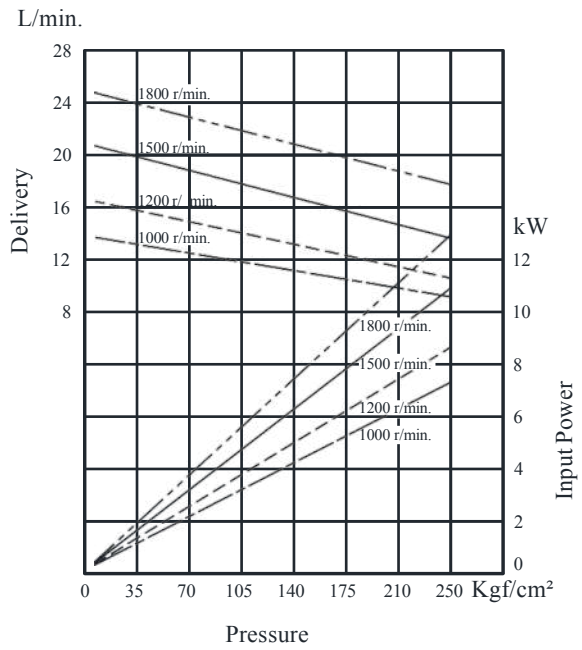

• SVP1 – 14

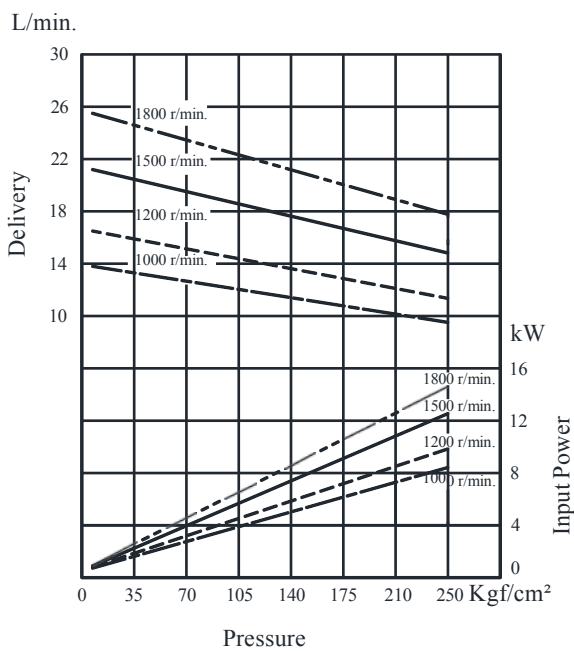

• SVP1 – 26

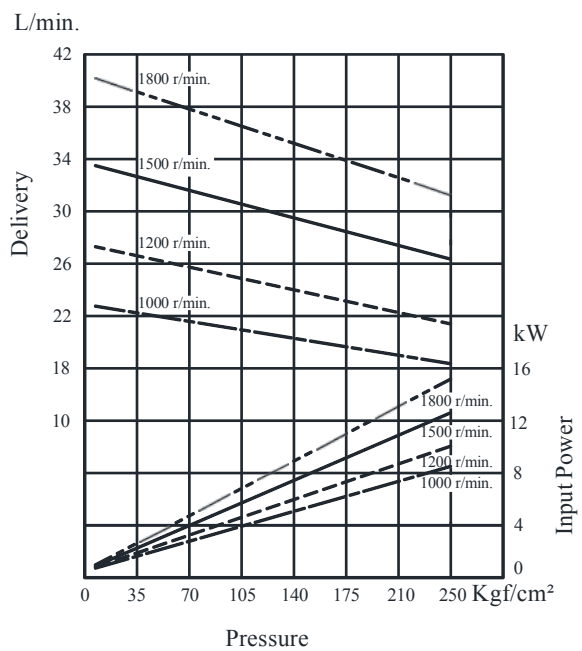

B

SVP Series  
Single Vane Pumps


## ■ SVP2 – Series Single Vane Pump

These pumps have been developed especially for low noise operation. To comply with a wide range of applications, for instance the injection moulding machine industry. We provide a wide range of delivery volumes [10.8 ~ 47 cm<sup>3</sup>/rev.] for the pumps.

The main internal parts of the pumps are built as a cartridge kit. Therefore, maintenance can be easily done by simply changing the cartridges.



Graphic Symbol



## ■ Specifications

Model Number	Geometric Displacement cm <sup>3</sup> /rev.	Max. Opr. Pressure Kg/cm <sup>2</sup>	Output Flow & Input Power kW	Shaft Speed Range r/min.		Mass Kg.	
				Max.	Min.	Flange Mounting	Foot Mounting
SVP2※-11	10.4	210	Refer Page 161, 162 & 163	1800*	600	16	18.7
SVP2※-17	16.1						
SVP2※-22	21.7						
SVP2※-25	24.1						
SVP2※-30	29.5						
SVP2※-33	31.7						
SVP2※-38	35.4						
SVP2※-43	40.8						
SVP2※-47	42.6						

\* For speeds above 1500 r/min., consult factory for information.

## ■ Model Number Designation

F-	SVP2	-L	-F	-11	-R	A	A	-10
Special Seals **	Series Number	Type of Mounting	Type of Pipe Connection	Nominal Delivery	Direction of Rotation	Discharge Port Position	Suction Port Position	Design* Number
						As Viewed From Shaft End		
<b>F:</b> For Phosphate Ester type Fluids. (omit if not required)	<b>SVP2</b>	<b>L:</b> Foot Type  <b>F:</b> Flange Type	<b>F:</b> Flange Connection	<b>11</b> <b>17</b> <b>22</b> <b>25</b> <b>30</b> <b>33</b> <b>38</b> <b>43</b> <b>47</b>	<b>R:</b> Clockwise (Normal)  <b>L:</b> Counter-clockwise			<b>10</b>

\* Design numbers subject to change from 10 to 19, but installation dimensions remain as shown.

\* For instructions regarding changing the port positions, consult CNIP INDIA LTD.

\*\* Before ordering the Special Seals, consult CNIP INDIA LTD.

## SVP Series Single Vane Pump

## Cartridge Kit Model Number

CSVP2	-11	-R	-10
Model Number	Nominal Delivery	Shaft Rotation	Design No.
CSVP2	11	R: Clockwise (Normal)	10
	17		
	22		
	25		
	30	L: Counter- Clockwise	
	33		
	38		
	43		
47			

\* For instructions regarding replacing cartridge kit, consult CNIP INDIA LTD.

## Flanges

Note: Please refer page no. 725 for flange details.

## Spare Parts List

### List of Seals

Sl. No.	Name of Part	Part Number	Qty.
1	O-Ring	SO-NA-P41	1
2	O-Ring	SO-NA-G80	1
3	O-Ring	SO-NB-G85	1
4	Backup-Ring	SO-BB-P41	1
5	Backup-Ring	SO-BB-G80	1
6	Oil Seal	ISPD 25388	1


Note: When ordering the seals, please specify the seal kit number KS-SVP2-10.



## SVP2-F-F-※-※※※※-10


### • Flange Mounting

DIMENSIONS IN MILLIMETRES

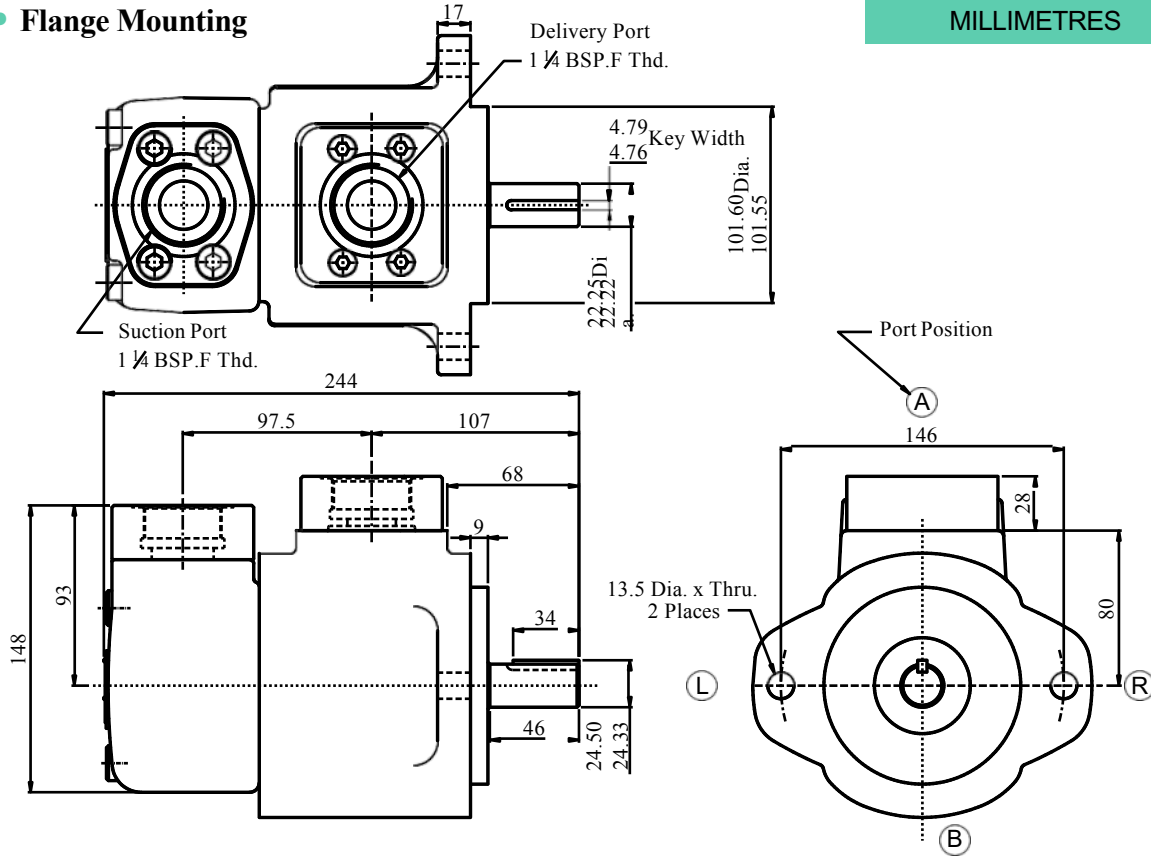


## SVP2-L-F-※-※※※※-10

### • Foot Mounting

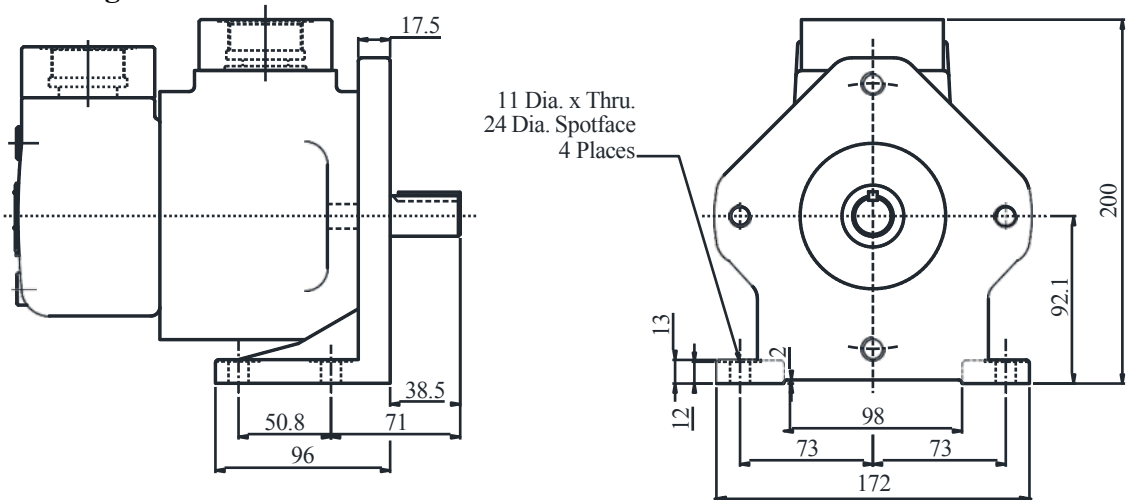

For further dimensions refer Flange Mounting.





For Reference: Dimensions of Pipe Flange Mounting Surface

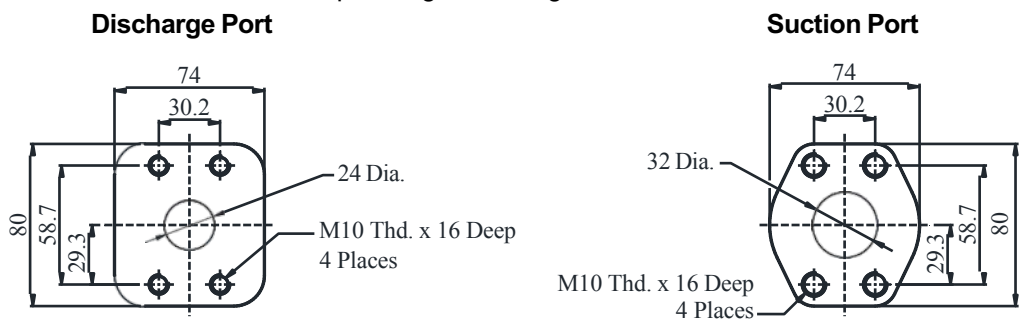





## Typical Pump Characteristics Oil Viscosity 20 cSt [VG 32, Temp 50°C]

**B**


SVP Series  
Single Vane Pumps

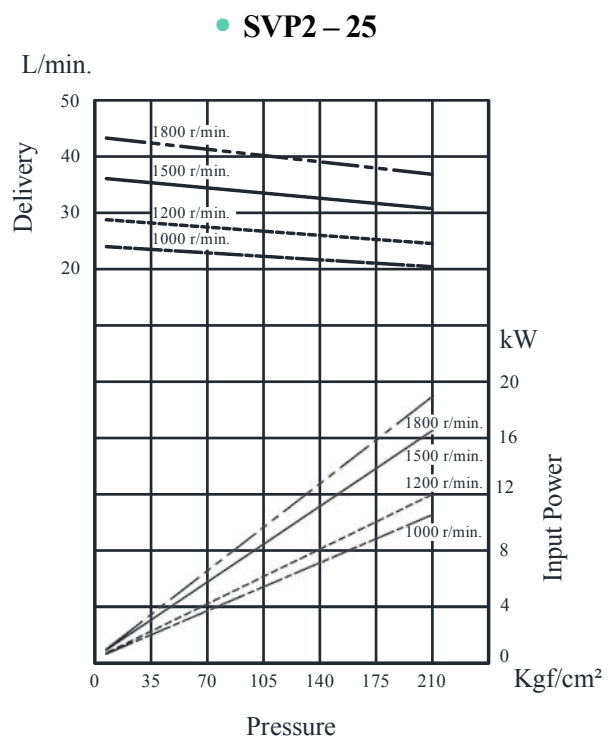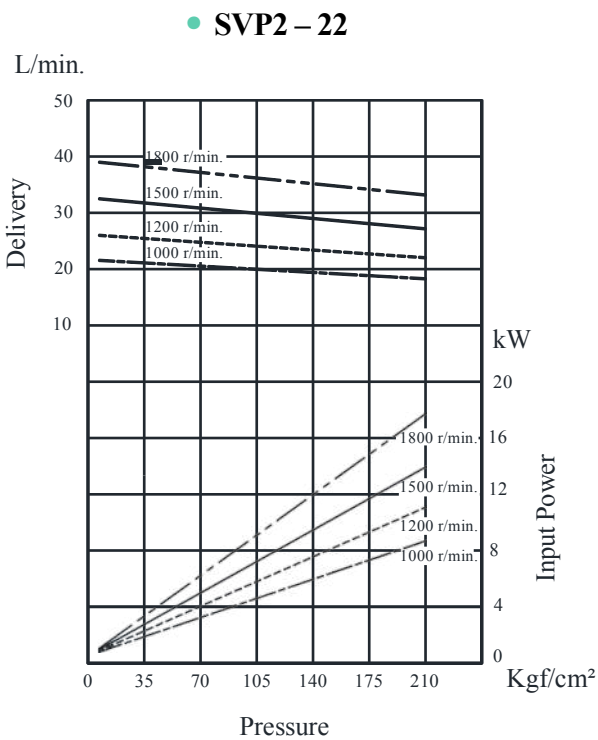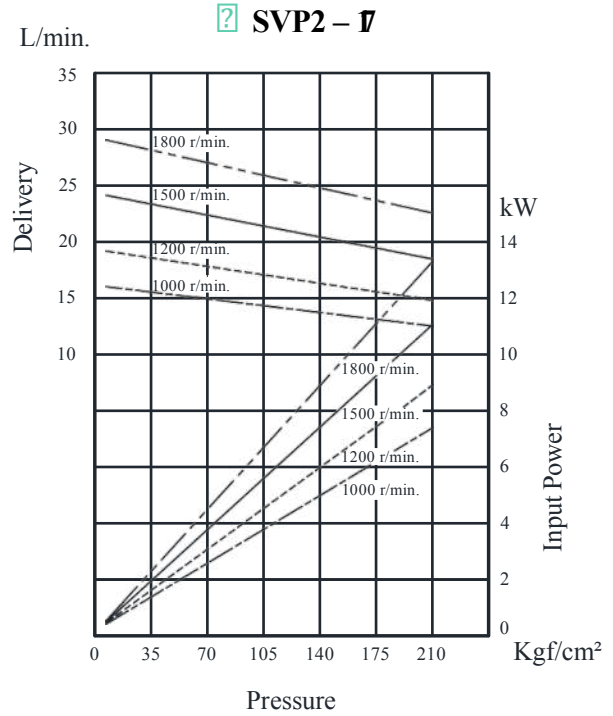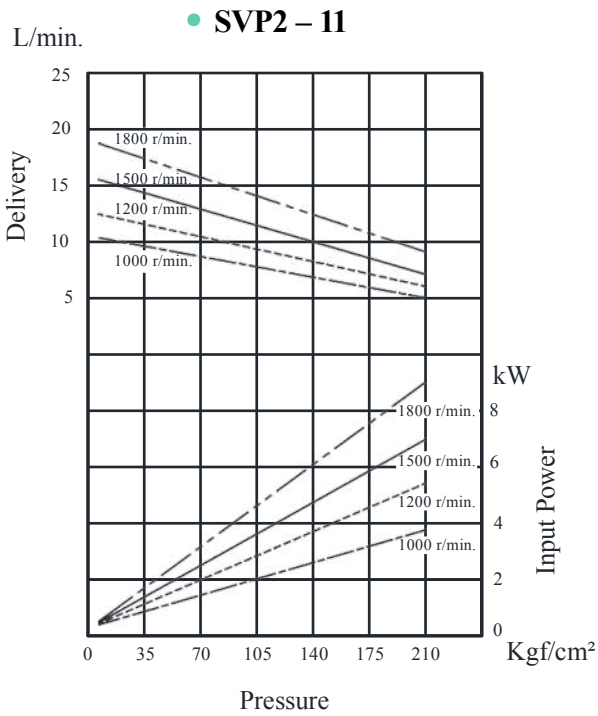

## Typical Pump Characteristics Oil Viscosity 20 cSt [VG 32, Temp 50°C]

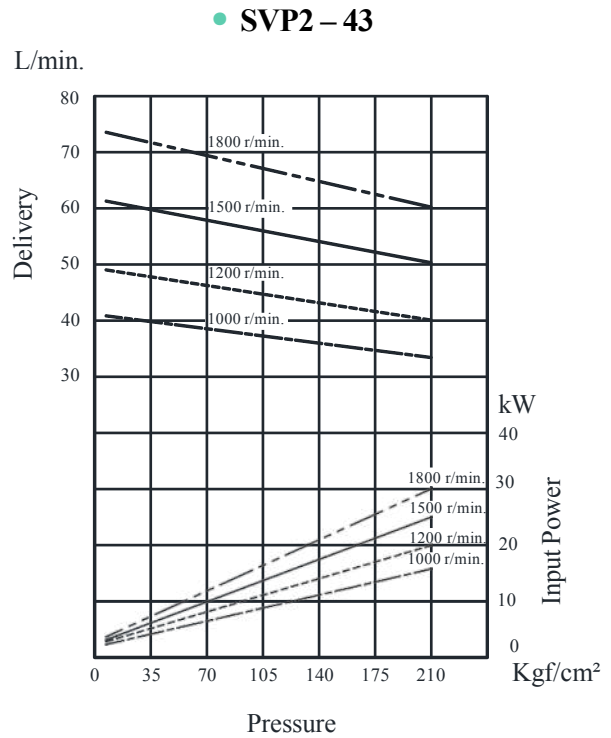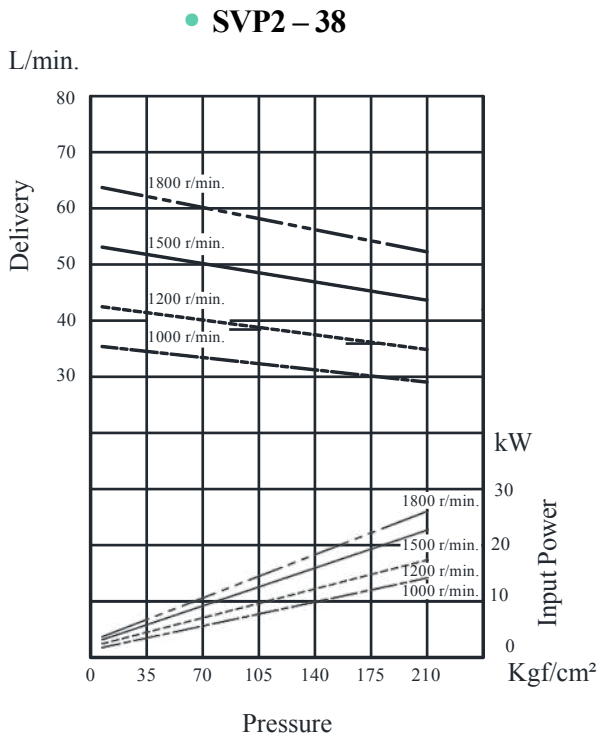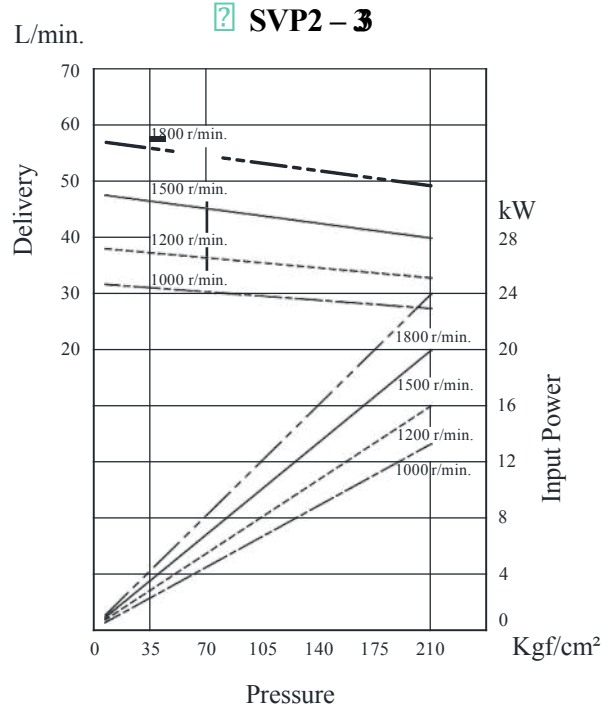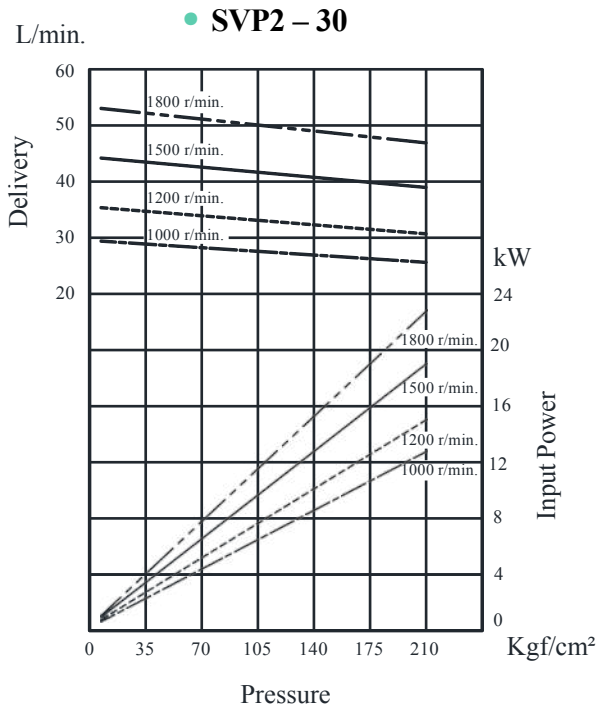

## Typical Pump Characteristics Oil Viscosity 20 cSt [VG 32, Temp 50°C]

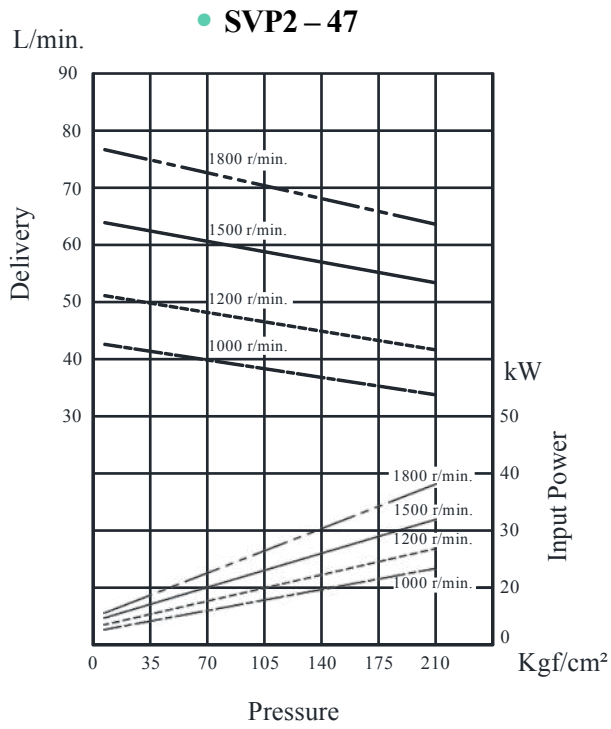

**B**


SVP Series  
Single Vane Pumps

## SVP3 – Series Single Vane Pump

These pumps are widely used as a source of hydraulic power. They combine stable performance and robust construction with a wide range of delivery rates.



Graphic Symbol



## Specifications

Model Number	Geometric Displacement cm <sup>3</sup> /rev.	Max. Opr. Pressure Kgf/cm <sup>2</sup>	Output Flow & Input Power kW	Shaft Speed Range r/min.		Mass Kg.	
				Max.	Min.	Flange Mounting	Foot Mounting
SVP3-**-**-50	47	210	Refer Page 167 & 168	1800*	600	38.5	45.1
SVP3-**-**-58	57						
SVP3-**-**-75	75						
SVP3-**-**-92	92						
SVP3-**-**-117	115						
SVP3-**-**-142	135						

\* For speeds above 1500 r/min., consult factory for information.

## Model Number Designation

F-	SVP3	-L	-F	-50	-R	A	A	-10
Special Seals **	Series Number	Type of Mounting	Type of Pipe Connection	Nominal Delivery	Direction of Rotation	Discharge Port Position	Suction Port Position	Design * Number
As Viewed From Shaft End								
<b>F:</b> For Phosphate Ester type Fluids. (omit if not required)	<b>SVP3</b>	<b>L:</b> Foot Type  <b>F:</b> Flange Type	<b>F:</b> Flange Connection	<b>50</b> <b>58</b> <b>75</b> <b>92</b> <b>117</b> <b>142</b>	<b>R:</b> Clockwise (Normal)  <b>L:</b> Counter-Clockwise			<b>10</b>

\* Design numbers subject to change from 10 to 19, but installation dimensions remain as shown.

\* For instructions regarding changing the port positions, consult CNIP INDIA LTD.

\*\* Before ordering the Special Seals, consult CNIP INDIA LTD.

## ■ Cartridge Kit Model Number

CSVP3	-50	-R	-10
Model Number	Nominal Delivery	Shaft Rotation	Design No.
CSVP3	50	R: Clockwise (Normal)	10
	58		
	75		
	92	L: Counter- Clockwise	
	117		
	142		

\* For instructions regarding replacing cartridge kit, consult CNIP INDIA LTD.

## ■ Flanges

Note: Please refer page no. 725 for flange details.

## ■ Spare Parts List


### ● List of Seals

Sl. No.	Name of Part	Part Number	Qty.
1	O-Ring	ARP 568-231	1
2	O-Ring	SO-NA-G120Y	1
3	O-Ring	SO-NB-G125	1
4	Back Up Ring	JIS W1516-G9	1
5	Back Up Ring	SO-BB-G120	1
6	Oil Seal	38 55 8	1


Note: When ordering the seals, please specify the seal kit number KS-SVP3-10.

## SVP3-F-F-※-※※※※-10

### • Flange Mounting


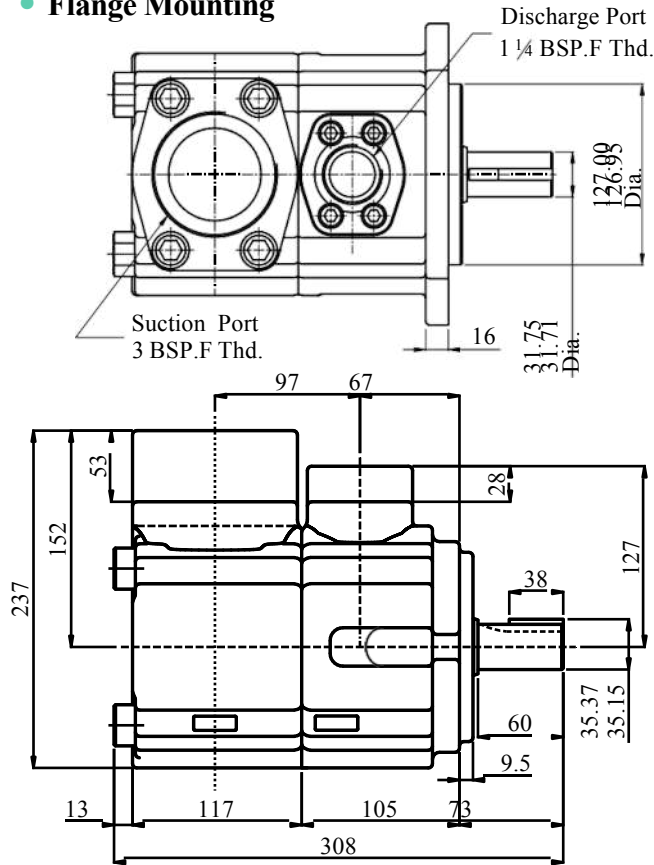


DIMENSIONS IN MILLIMETRES

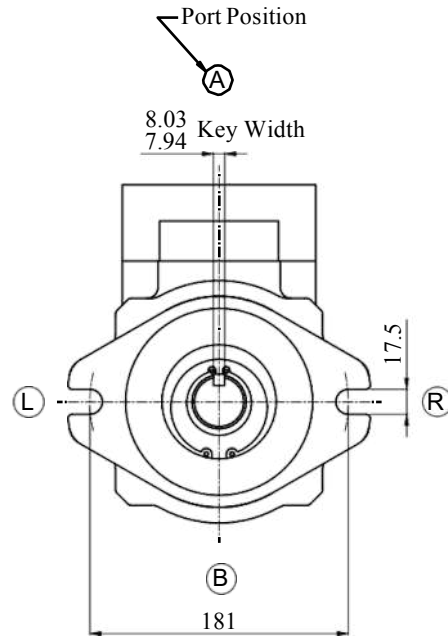


## SVP3-L-F-※-※※※※-10

### • Foot Mounting

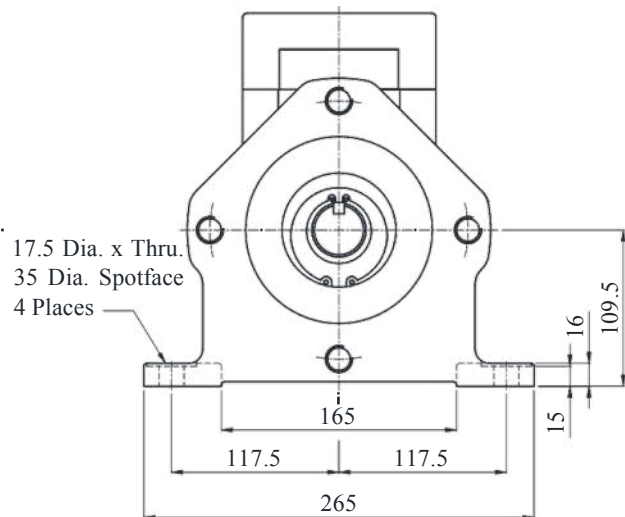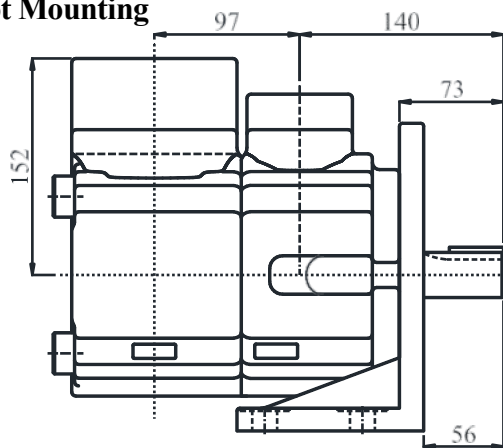

For further dimensions refer Flange Mounting.


**For Reference:** Dimensions of Pipe Flange Mounting Surface

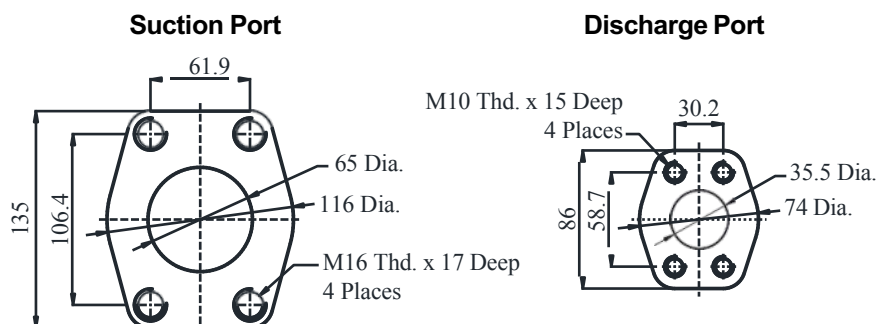


## SVP Series Single Vane Pump

## Typical Pump Characteristics Oil Viscosity 20 cSt [VG 32, Temp 50°C]


• SVP3 – 50

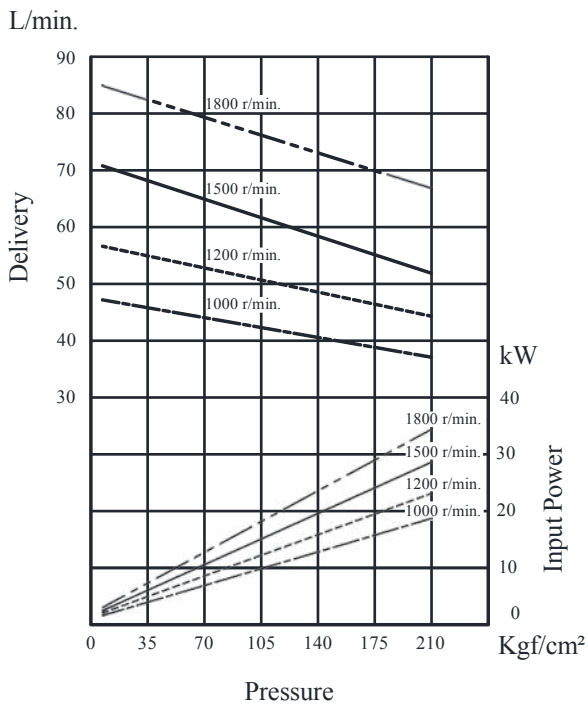


□ SVP3 – 8

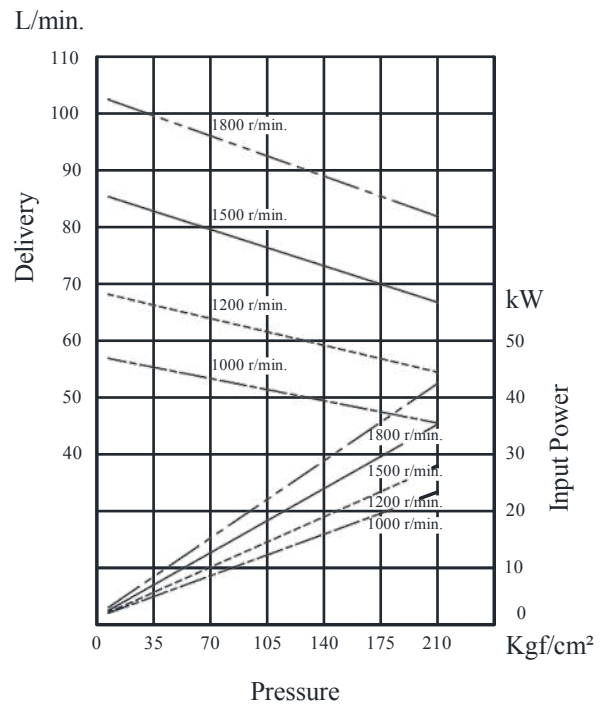

• SVP3 – 75

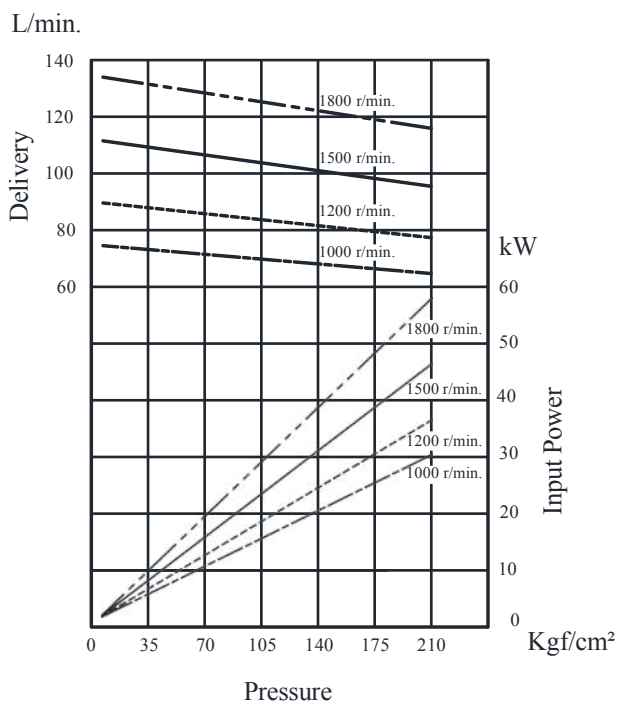


• SVP3 – 92

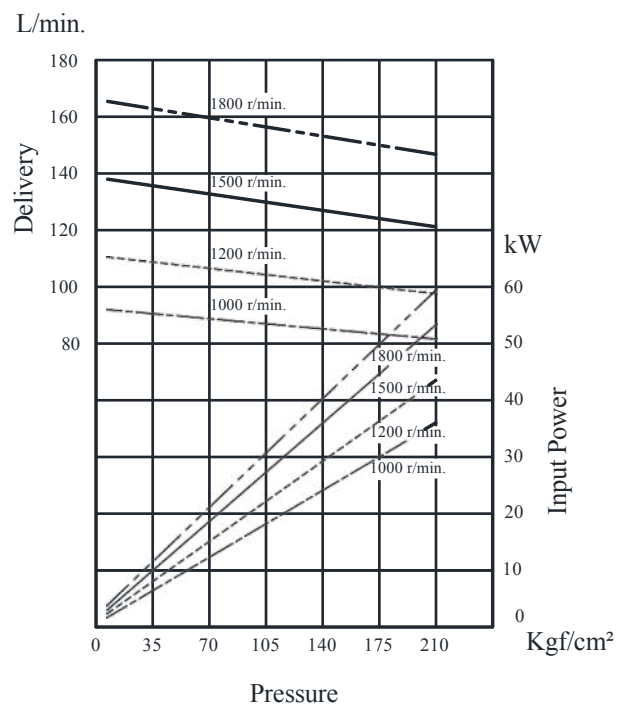




## Typical Pump Characteristics Oil Viscosity 20 cSt [VG 32, Temp 50°C]

### • SVP3 – 117

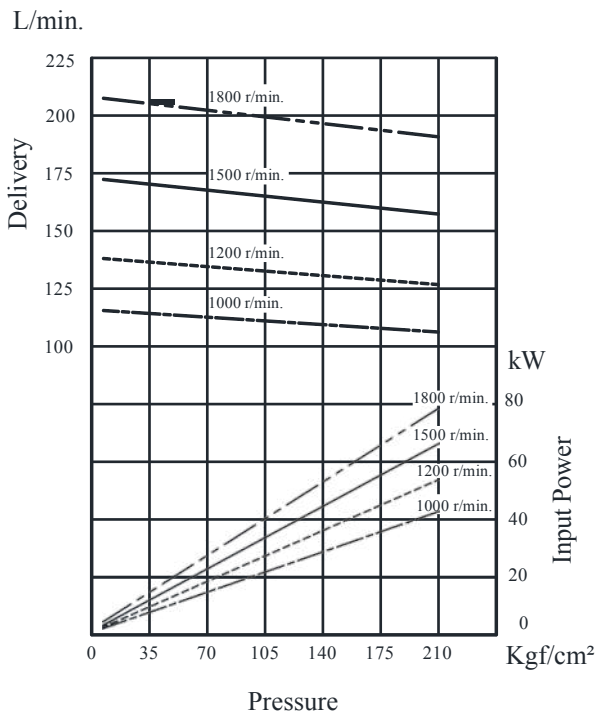

### □ SVP3 – 142

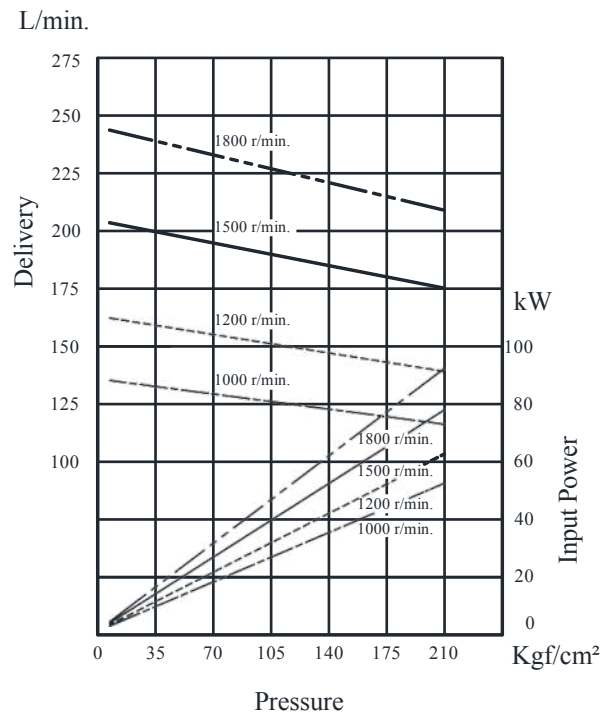

### ■ Cartridge Kit Model Number

Pump Model Numbers	Cartridge Kit Number #
SVP1T-5-※-R※-10	CSVP1-5-R-10
SVP1T-8-※-R※-10	CSVP1-8-R-10
SVP1T-14-※-R※-10	CSVP1-14-R-10
SVP2-※-F-22-R※※-10	CSVP2-22-R-10
SVP2-※-F-33-R※※-10	CSVP2-33-R-10
SVP2-※-F-43-R※※-10	CSVP2-43-R-10
SVP3-※-F-58-R※※-10	CSVP3-58-R-10
SVP3-※-F-92-R※※-10	CSVP3-92-R-10
SVP3-※-F-142-R※※-10	CSVP3-142-R-10

\* For instructions regarding replacing cartridge kit, consult CNIP INDIA LTD.

# The above table does not include all combinations of cartridges available. Only a few representative samples are shown.